


Floor, ceiling and external wall details.



ROBUST DETAIL E-FC-9 Average of 32 tests	
Airborne DnTw+Ctr	Impact LnTw
52.6dB	49dB
Approved Document E requirements	Approved Document E requirements
45dB Not less than	62dB Not greater than

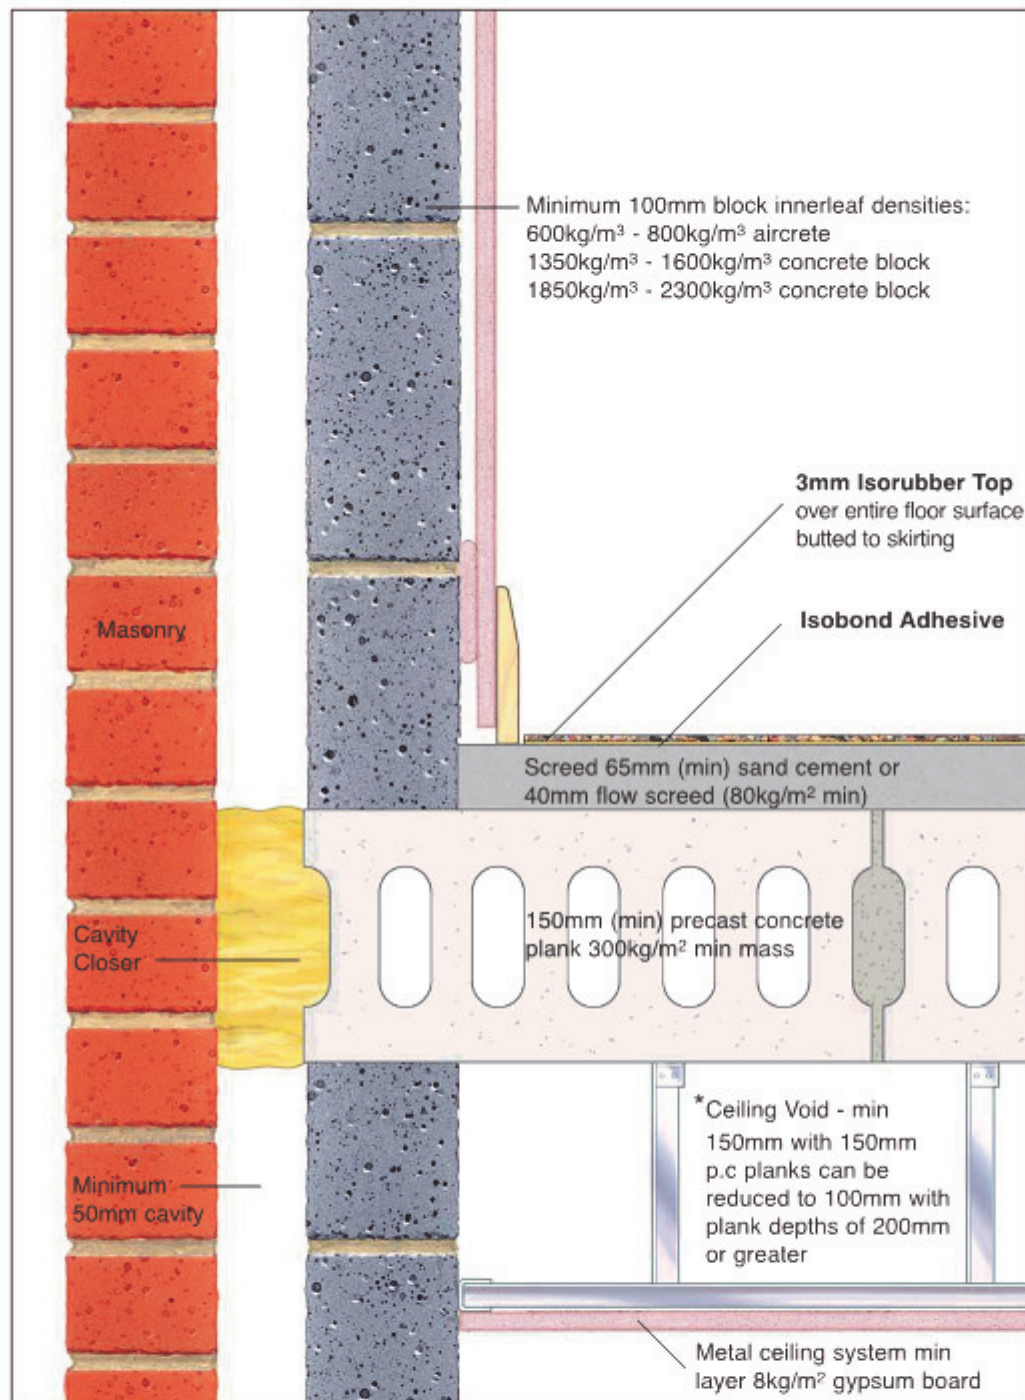

For the full **Robust Details** specifications, refer to the "**Robust Details Ltd Pattern Book**".

NON ROBUST DETAIL APPLICATIONS

Isorubber Top can be applied to most types of concrete floors to achieve building regulation 'Approved Document E' standard sound insulation levels.

The product can be used as a direct base for all types of floor coverings including: Hardwoods, Laminates, Ceramic and Stone floor finishes.

The **Isosonic Floor sound insulation systems Product Selector** offers a large choice of new build and refurbishment solutions for both timber and concrete floors.